

SQUARE CANOPY – model: QMP-1SQ-TR

WAC LIGHTING

Quick Connect™ Canopies

Responsible Lighting®




Fixture Type:

Catalog Number:

Project:

Location:

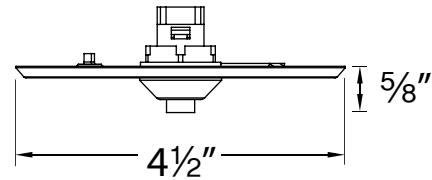

PRODUCT DESCRIPTION

Quick Connect™ canopy for use with low voltage Quick Connect™ QP series pendants or QF series track heads. Designed to be installed on ceilings or wood surfaces.

FEATURES

- Order remote transformer separately
- No exposed hardware
- The housing is installed in the cutout hole and then the faceplate is attached

SPECIFICATIONS

- **Power:** Remote transformer required (order separately)
- **Standards:** UL & CUL listed
- **Mounting:** Mounts over a standard 4" junction box, Base plate covers junction box opening, the canopy attaches to base plate with metal nut.

ORDER NUMBER

Model #	Finish
QMP-1SQ-TR	BN <i>Brushed Nickel</i>
	CH <i>Chrome</i>
	DB <i>Dark Bronze</i>

Example: QMP-1SQ-TR –

Example: QMP-1SQ-TR-WT

REMOTE TRANSFORMERS

Model #	Input	Output	Min Load	L	W	H	
EN-1260-RB2	120V	12V, 60W	1W	6½"	1⅝"	1¼"	Fits through small openings
EN-2460-RB2	120V	24V, 60W	1W	6½"	1⅝"	1¼"	
EN-24100-RB2	120V	24V, 96W	1W	6½"	1⅝"	1¼"	
EN-12120-RB2	120V	12V, 2 × 60W	1W	6"	3¼"	2⅝"	Includes LED indicator lights and integral push in terminals
EN-12180-RB2	120V	12V, 3 × 60W	1W	6¾"	3⅝"	2⅝"	
EN-12300-RB2	120V	12V, 5 × 60W	1W	8½"	4⅞"	2⅝"	
EN-1260-P-AR-BK	120V	12V, 60W	1W	2¾"	1⅝"	1¾"	Plug-in power supply with on/off switch and 6' detachable cord
EN-1260-P-AR-WT	120V	12V, 60W	1W	2¾"	1⅝"	1¾"	
EN-2460-P-AR	120V	24V, 60W	1W	2¾"	1⅝"	1¾"	
EN-1260-RB-AR	120V	12V, 60W	1W	6½"	1⅝"	1¼"	Enclosure has separate compartments for transformer, line and low voltage wiring
EN-1275-RB-AR	120V	12V, 75W	1W	6½"	1⅝"	1¼"	
EN-12100-RB-AR	120V	12V, 100W	1W	6¼"	3"	1⅝"	Includes LED indicator lights and integral push in terminals
EN-12150-RB-AR	120V	12V, 150W	1W	6¼"	3"	1⅝"	
EN-24150-RB-AR	120V	24V, 150W	1W	6¼"	3"	1⅝"	
EN-B12PY-AR	120V	12V, 250W	1W	6¼"	3⅝"	2⅝"	
EN-B24PZ-AR	120V	24V, 300W	1W	6¼"	3⅝"	2⅝"	
EN-1260-R2*	120V 50/60Hz	12V, 60W	1W	2⅝"	1⅝"	1"	Designed to be used as a replacement part for factory installed transformers or installed in a properly listed enclosure
EN-1260-R-AR	120V 50/60Hz	12V, 60W	1W	2⅝"	1⅝"	1"	
EN-1275-R-AR	120V 50/60Hz	12V, 75W	1W	2⅝"	1⅝"	1"	
EN-12100-R-AR	120V 50/60Hz	12V, 100W	1W	3½"	1½"	1⅝"	
EN-12150-R-AR	120V 50/60Hz	12V, 150W	1W	3½"	1½"	1⅝"	
EN-24150-R-AR	120V 50/60Hz	24V, 150W	1W	3½"	1½"	1⅝"	

WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center
1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585