

WARNING

IMPORTANT: NEVER attempt any work without shutting off the electricity.

- Read all instructions before installing.
- System is intended for installation by a qualified electrician in accordance with the National Electrical Code and local regulations.
- Go to the main fuse box, or circuit breaker. Place the main power switch in the "OFF" position and unscrew the fuse(s) or switch "OFF" the circuit breaker switch(es) that control the power to the fixture or room that you are working on.
- Place the wall switch in the "OFF" position.

CAUTION

- All parts must be used as indicated in these instructions. Do not substitute any parts, leave parts out, or use any parts that are worn out or broken. Failure to follow this instruction could invalidate the ETL/CETL listing of this fixture.
- When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the base only.

AVERTISSEMENT

IMPORTANT : Coupez l'électricité avant TOUTE manipulation.

- Lisez toutes les instructions avant d'installer.
- Système est destiné à être installé par un électricien qualifié en conformité avec le code national de l'électricité et les règlements locaux. Accédez au panneau central de disjoncteurs ou de fusibles de votre demeure et placez l'interrupteur principal en position d'arrêt (« OFF »).
- Placez l'interrupteur mural en position d'arrêt (« OFF »).

MISE EN GARDE

- Toutes les pièces doivent être utilisées tel qu'il est indiqué dans ces instructions. Ne remplacez pas les pièces, n'en laissez pas de côté et ne les utilisez pas si elles sont usées ou brisées. Le non-respect de ces instructions peut annuler l'homologation ETL/CETL du luminaire.
- Ors de la manipulation de l'appareil, ne pas appliquer de pression à la LED, tenir l'appareil par la seule base.

ADVERTENCIA







IMPORTANTE: NUNCA intente hacer trabajos sin desconectar el suministro eléctrico.

- Lea y comprenda todas las instrucciones e ilustraciones por completo antes de proceder con el ensamblaje e instalación de esta lámpara.
- Sistema está diseñado para ser instalado por un electricista calificado, de acuerdo con el código eléctrico nacional y las normas locales.
- Diríjase a la caja de fusibles o a la caja del interruptor de circuito principal en su hogar. Coloque el interruptor de alimentación principal en la posición "OFF" (APAGADO).
- Coloque el interruptor de la pared en la posición "OFF" (APAGADO).

PRECAUCIÓN

- Todas las piezas deben usarse como lo indican estas instrucciones. No reemplace las piezas, no omita piezas durante la instalación ni utilice piezas gastadas o rotas. El incumplimiento de esta indicación podría invalidar la calificación ETL/CETL esta lámpara.
- Al manipular el aparato, no aplique presión a los LED, mantenga el aparato en la base sólo.

Hardware

						
Wire Connector Qty: 3pcs+1 Extra 7EAC112201	Junction Box Screw Qty: 4pcs+1 Extra 7MPF0825C1 #8-32x1	Mounting Screw Qty: 1 Extra 7MPF0412S1BK 5/32"-32x6/16 Black	Allen Screw Qty: 1 Extra 7MPF030803NI 1/8"-40x5/16 Nickel Plating	Allen Wrench Qty: 1 Extra 7MPE155003	Plastic Anchor QTY: 1Extra 7TDD082401	Wood Screw QTY: 1Extra 7MPF2204J2 (Ni) Ø 4x 7/8 Ni

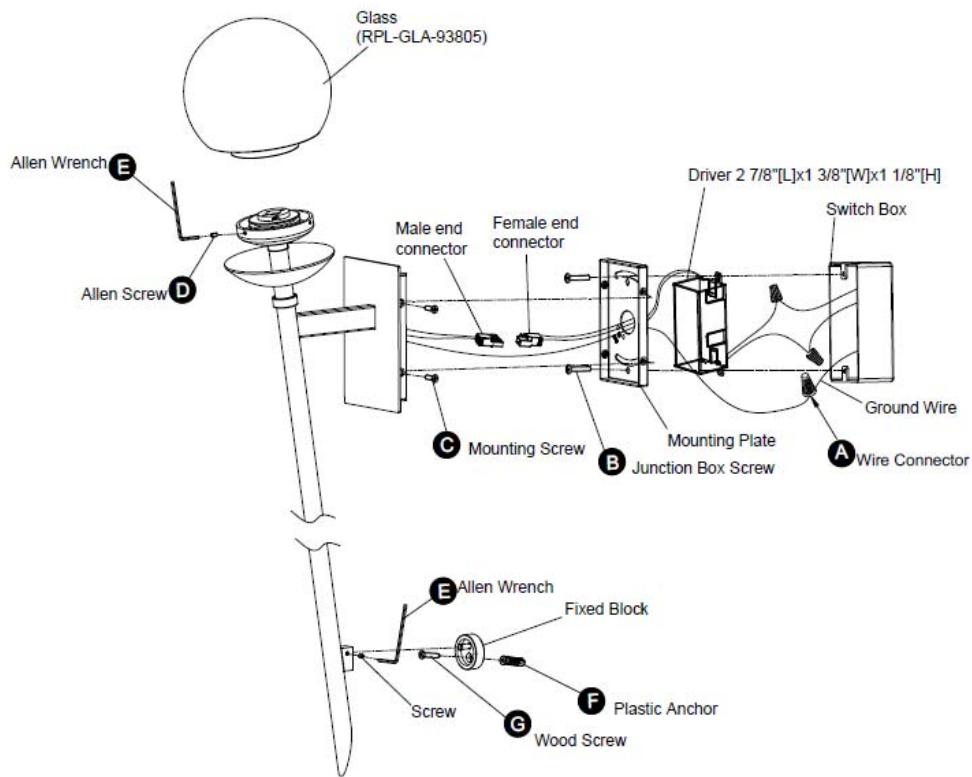


Fig. 1

PREPARATION

1. Shut off the power at the circuit breaker and remove existing fixture, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Be careful not to lose any small parts necessary for installation. Make sure do not scratch your fixture.

MOUNT ON SWITCH BOX (Fig. 1)

1. Remove the mounting screw (C) from the fixture.
2. Determine a good location, Secure the fixed block to the wall using the wood screw (F).
3. Connect the driver input wire to switch box wires as shown in Fig. 3, making sure that all wire connectors (A) are secured. If your outlet box has a green or bare copper ground wire, connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the back plate using the green screw provided. After wires are connected, tuck them carefully inside the switch box.

*Requires driver to be recessed within the switch box.

4. Secure the mounting plate to the switch box using the junction box screws (B). the side of the mounting plate marked "GND" must face out.
5. Connect the driver output wires with the fixture by Female/Male end connector.
6. Place the fixture over the mounting plate and secure it with mounting screws (C). Secure them with screw using Allen wrench (E).
7. Thread the glass of glass holder. Secure them with Allen screw (D) using Allen wrench (E).

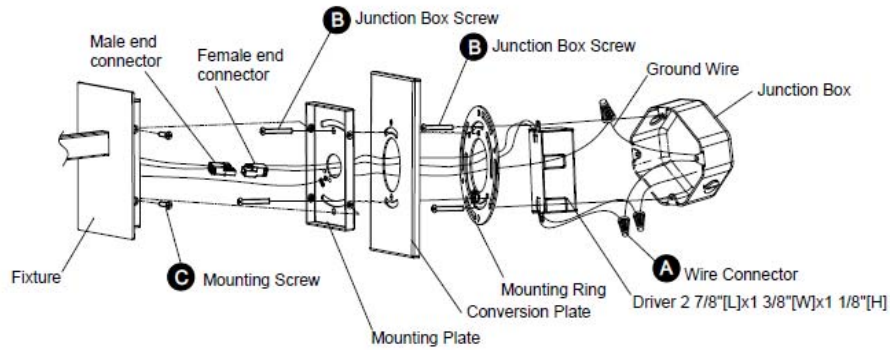


Fig. 2

MOUNT ON JUNCTION BOX (Fig. 2)

1. Remove the mounting screw (C) from the fixture.
2. Connect the driver input wire to switch box wires as shown in Fig. 3, making sure that all wire connectors (A) are secured. If your outlet box has a green or bare copper ground wire, connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the back plate using the green screw provided. After wires are connected, tuck them carefully inside the switch box.

***Requires driver to be recessed within the junction box.**

3. Secure the mounting ring to the junction box using the junction box screws (B). Make sure the two holes (Spacing 2-3/4") are horizontal as shown in Fig. 2. The side of the mounting plate marked "GND" must face out.
4. Secure the fixed block to the wall using the wood screw (F).
5. Secure the mounting plate and conversion plate to the mounting ring with junction box screws (B).
6. Connect the driver output wires with the fixture by Female/Male end connector.
7. Place the fixture over the mounting plate and secure it with mounting screws (C). Secure them with screw using Allen wrench (E).
8. Thread the glass on the top of glass holder. Secure them with Allen screw (D) using Allen wrench (E).

Fig. 3 Wiring

	<table border="1"> <tr> <td>Fixture Wires Black or Smooth</td> <td>House Wires Black (Hot)</td> </tr> <tr> <td>Fixture Wires White or Ribbed</td> <td>House Wires White (Neutral)</td> </tr> <tr> <td>Fixture Wires Bare wire (Ground)</td> <td>House Wires Green or Bare Copper (Ground)</td> </tr> </table>	Fixture Wires Black or Smooth	House Wires Black (Hot)	Fixture Wires White or Ribbed	House Wires White (Neutral)	Fixture Wires Bare wire (Ground)	House Wires Green or Bare Copper (Ground)	<table border="0"> <tr> <td> <p>Back Plate Dimensions</p> <p>7MBC105504</p> </td> <td> <p>Conversion Plate Dimensions</p> <p>4MBC151110B4</p> </td> <td> <p>Mounting Ring Dimensions</p> <p>7MBC101501</p> </td> </tr> </table>	<p>Back Plate Dimensions</p> <p>7MBC105504</p>	<p>Conversion Plate Dimensions</p> <p>4MBC151110B4</p>	<p>Mounting Ring Dimensions</p> <p>7MBC101501</p>
	Fixture Wires Black or Smooth	House Wires Black (Hot)									
	Fixture Wires White or Ribbed	House Wires White (Neutral)									
Fixture Wires Bare wire (Ground)	House Wires Green or Bare Copper (Ground)										
<p>Back Plate Dimensions</p> <p>7MBC105504</p>	<p>Conversion Plate Dimensions</p> <p>4MBC151110B4</p>	<p>Mounting Ring Dimensions</p> <p>7MBC101501</p>									

WARNING

IMPORTANT: NEVER attempt any work without shutting off the electricity.

- Read all instructions before installing.
- System is intended for installation by a qualified electrician in accordance with the National Electrical Code and local regulations.
- Go to the main fuse box, or circuit breaker. Place the main power switch in the "OFF" position and unscrew the fuse(s) or switch "OFF" the circuit breaker switch(es) that control the power to the fixture or room that you are working on.
- Place the wall switch in the "OFF" position.

CAUTION

- All parts must be used as indicated in these instructions. Do not substitute any parts, leave parts out, or use any parts that are worn out or broken. Failure to follow this instruction could invalidate the ETL/CETL listing of this fixture.
- When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the base only.

AVERTISSEMENT

IMPORTANT : Coupez l'électricité avant TOUTE manipulation.

- Lisez toutes les instructions avant d'installer.
- Système est destiné à être installé par un électricien qualifié en conformité avec le code national de l'électricité et les règlements locaux. Accédez au panneau central de disjoncteurs ou de fusibles de votre demeure et placez l'interrupteur principal en position d'arrêt (« OFF »).
- Placez l'interrupteur mural en position d'arrêt (« OFF »).

MISE EN GARDE

- Toutes les pièces doivent être utilisées tel qu'il est indiqué dans ces instructions. Ne remplacez pas les pièces, n'en laissez pas de côté et ne les utilisez pas si elles sont usées ou brisées. Le non-respect de ces instructions peut annuler l'homologation ETL/CETL du luminaire.
- Ors de la manipulation de l'appareil, ne pas appliquer de pression à la LED, tenir l'appareil par la seule base.

ADVERTENCIA

IMPORTANTE: NUNCA intente hacer trabajos sin desconectar el suministro eléctrico.

- Lea y comprenda todas las instrucciones e ilustraciones por completo antes de proceder con el ensamblaje e instalación de esta lámpara.
- Sistema está diseñado para ser instalado por un electricista calificado, de acuerdo con el código eléctrico nacional y las normas locales.
- Diríjase a la caja de fusibles o a la caja del interruptor de circuito principal en su hogar. Coloque el interruptor de alimentación principal en la posición "OFF" (APAGADO).
- Coloque el interruptor de la pared en la posición "OFF" (APAGADO).

PRECAUCIÓN

- Todas las piezas deben usarse como lo indican estas instrucciones. No reemplace las piezas, no omita piezas durante la instalación ni utilice piezas gastadas o rotas. El incumplimiento de esta indicación podría invalidar la calificación ETL/CETL esta lámpara.
- Al manipular el aparato, no aplique presión a los LED, mantenga el aparato en la base sólo.

Hardware



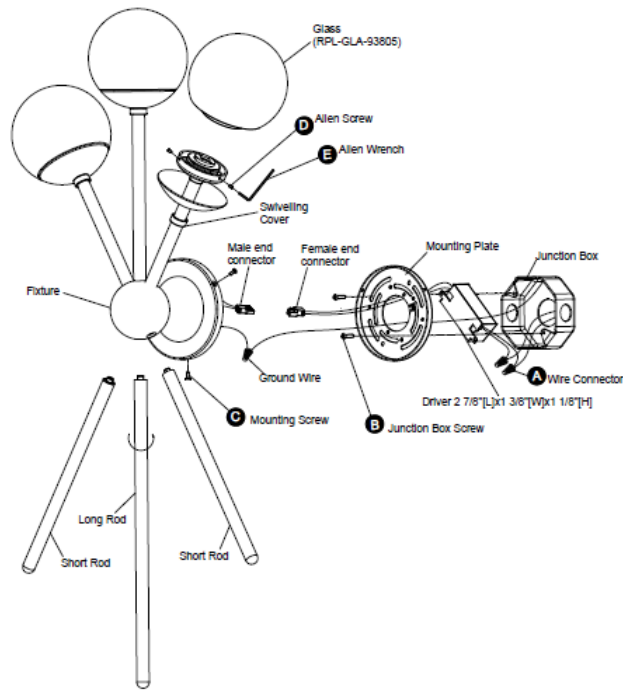


Fig. 1

PREPARATION

1. Shut off the power at the circuit breaker and remove existing fixture, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Be careful not to lose any small parts necessary for installation. Make sure do not scratch your fixture.

MOUNTING THE FIXTURE (Fig. 1)

3. Remove the mounting screw (C) from the mounting back plate.
4. Secure the mounting back plate to the junction box using junction box screws (B). The side of the mounting back plate marked "GND" must face out.


CONNECTING THE WIRES (Fig. 2)

5. Connect the fixture's wires to junction box wires as shown in Fig. 2, making sure that all wire connectors (A) are secured. If your outlet box has a green or bare copper ground wire, connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the back plate using the green screw provided. After wires are connected, tuck them carefully inside the junction box.

COMPLETING THE INSTALLATION (Fig. 1)

6. Secure the rods with the fixture.
7. Connect the driver output wires with the fixture by Female/Male end connector.
8. Secure the fixture to the mounting back plate using the mounting screw (C).
9. Thread the glass on the top of glass holder. Secure them with Allen screw (D) using Allen wrench (E).

Fig.2 Wiring

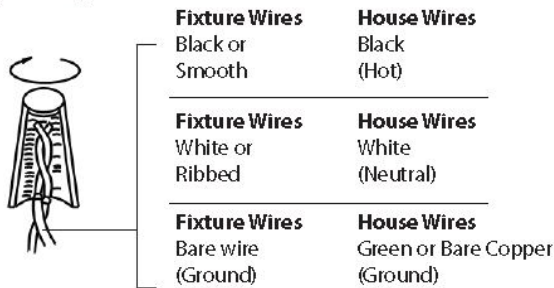

Back Plate Dimensions

