


# HR-LED232R

## 1" LEDme® Miniature Recessed Adjustable Spot

# WAC LIGHTING

Responsible Lighting®

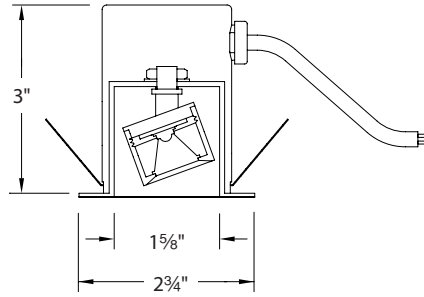

Fixture Type:

Catalog Number:

Project:

Location:

### PRODUCT DESCRIPTION

Adjustable round miniature recessed trim for use with a remote driver. Perfect for use under cabinets or in wall niches.

### FEATURES

- 1" aperture
- Cutout: 2 1/2"
- Less than 1/16" thick, super low profile trim
- Narrow flood beam spread
- 40° adjustment from vertical with home docking position to ensure light is projected straight down when needed
- 350° horizontal rotation
- 80,000 hour rated life
- 5 year WAC Lighting product warranty

### FIXTURE PERFORMANCE

Model #	Color Temp	Watt	Lumens	CBCP	Beam	CRI
HR-LED232R-27	2700K	4W*	245	505	35°	85
HR-LED232R-30	3000K	4W*	250	515	35°	85
HR-LED232R-35	3500K	4W*	265	546	35°	85
HR-LED232R-40	4000K	4W*	280	580	35°	85

\*Power consumption may vary depending on efficiency of the system being used.

### SPECIFICATIONS

**Construction:** Die-cast aluminum trim, aluminum heat sink and 20 gauge steel housing painted black.

**Wiring:** Socket and insulated wires are pre-installed within housing, wires lead out through the side of the housing for connection to remote driver.

**Driver:** Remote LEDme® electronic low voltage driver required (see below). Dimming and non-dimming drivers available. Use a multiple terminal block to wire up to 3 fixtures for dimmable drivers

**Light Source:** Includes one 3W ANSI compliant Warm/Neutral LED for the finest color consistency possible. Replacement modules available.

**Dimming:** May be dimmed to 10% with electronic low voltage (ELV) dimmer.

**Mounting:** Two heavy gauge inner retention clips push out onto mounting surface to firmly hold fixture in place. Accommodates surface up to 3/4" thick. 2 1/2" cutout hole. Approved for use in ceilings with a Class 2 driver.

**Finish:** Available in White (WT) powder coat paint and electroplated Brushed Nickel (BN) and Gun Metal (GM).

**Rating:** Non-IC: insulation must be kept at least 3" away from the housing.

**Standards:** UL & cUL Damp Location Listed

### ORDER NUMBER

Model #	Color Temp	Finish
HR-LED232R	27 2700K	BN Brushed Nickel
	30 3000K	GM Gun Metal
	35 3500K	WT White
	40 4000K	

### FINISHES



### REPLACEMENT MODULES

Model #	Color Temp
RM1X3-27-1-DL	2700K
RM1X3-30-1-DL	3000K
RM1X3-35-1-DL	3500K
RM1X3-40-1-DL	4000K

**HR-LED232R** -  -

Example: HR-LED232R-40-GM

### LEDme® REMOTE DRIVERS

Model #	Description	Type	Dimming	# Fixture	Dimensions
LD-700MA03-EDIM-IS	Electronic low voltage	Hardwire	Yes	1	L: 5 5/8" W: 1 5/8" H: 1 1/8"
LD-700MA09-EDIM-IS	Electronic low voltage	Hardwire	Yes	3	L: 7 1/8" W: 3 1/8" H: 1 1/8"

See individual driver spec sheets for complete information.

### WAC Lighting

www.waclighting.com

Phone (800) 526.2588 • Fax (800) 526.2585

### Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050

Phone (516) 515.5000 • Fax (516) 515.5050

### Western Distribution Center

1750 Archibald Avenue • Ontario, CA 91760

Phone (800) 526.2588 • Fax (800) 526.2585