


# TUBE ARCHITECTURAL DS-PD05

## LED Pendant Mounts

# WAC LIGHTING

Responsible Lighting®

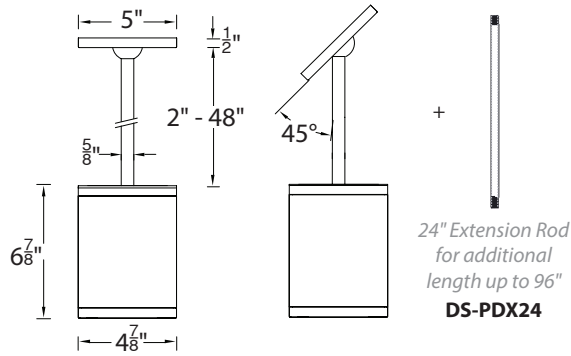

Seismic swivel tilts up to 45° to accommodate sloped ceiling

Fixture Type:

Catalog Number:

Project:

Location:

### PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cylindrical profile delivers accent and wall wash lighting. Comes in various light distribution and beam angle options.

### FEATURES

- Energy Star® rated (labeled with \*)
- High performance exterior rated LED pendant
- Includes 45° swivel canopy and 2 field cuttable 24" rods
- Solid aluminum construction
- 39° visual cutoff angle for glare control
- 5 year warranty

### SPECIFICATIONS

- Input:** Universal voltage 120V - 277VAC, 50/60Hz
- Dimming:** Electronic low voltage (ELV) : 100% - 5% (120V only)  
0-10V: 100% - 1% (120-277V)
- Light Source:** High output 3 Step Mac Adam Ellipse COB  
Rated life of 60,000 hours at L70
- Finish:** Electrostatically powder coated, white, black, bronze and graphite
- Standards:** IP65 rated, ETL & cETL wet location listed

### ORDERING NUMBER

Diameter	Watt	Color Temp	CRI	Lumen	CBCP	Efficacy (Lm/W)	Light Distribution	Finish
<p>DS-PD05 27W</p>	<b>S927</b>	2700K	90	1680	8526	62	<p>18°</p>	<b>BK</b> Black <b>WT</b> White <b>BZ</b> Bronze <b>GH</b> Graphite
	<b>S827*</b>	2700K	85	1800	9151	67		
	<b>S930</b>	3000K	90	1700	8639	63		
	<b>S830*</b>	3000K	85	1995	10126	74		
	<b>S835*</b>	3500K	85	2190	11118	81		
	<b>S840*</b>	4000K	85	2260	11483	84		
	<b>N927</b>	2700K	90	1730	5513	64	<p>25°</p>	
	<b>N827*</b>	2700K	85	1855	5918	69		
	<b>N930</b>	3000K	90	1750	5587	65		
	<b>N830*</b>	3000K	85	2055	6548	76		
	<b>N835*</b>	3500K	85	2255	7190	84		
	<b>N840*</b>	4000K	85	2330	7426	86		
	<b>F927</b>	2700K	90	1725	4246	64	<p>33°</p>	
	<b>F827*</b>	2700K	85	1850	4557	69		
	<b>F930</b>	3000K	90	1745	4302	65		
	<b>F830*</b>	3000K	85	2045	5043	73		
	<b>F835*</b>	3500K	85	2245	5537	83		
	<b>F840*</b>	4000K	85	2320	5719	86		

DS-PD05-\_\_\_\_\_ - \_\_\_\_\_

Example: DS-PD05-S930-WT

waclighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760




# TUBE ARCHITECTURAL DS-PD05

## LED Pendant Mounts

# WAC LIGHTING

Responsible Lighting®

### MOUNTING ACCESSORIES

	<i>Extension Rod</i>	<b>DS-PDX24</b>	<i>One 24" extension rod for DS-PDSK Can be field cut</i>	<b>Finish</b>	
				<b>BK</b> <i>Black</i>	
				<b>WT</b> <i>White</i>	
				<b>BZ</b> <i>Bronze</i>	
				<b>GH</b> <i>Graphite</i>	

Example: **DS-PDX24-WT**

**wacighting.com**  
Phone (800) 526.2588  
Fax (800) 526.2585

**Headquarters/Eastern Distribution Center**  
44 Harbor Park Drive  
Port Washington, NY 11050

**Central Distribution Center**  
1600 Distribution Ct  
Lithia Springs, GA 30122


**Western Distribution Center**  
1750 Archibald Avenue  
Ontario, CA 91760

# TUBE ARCHITECTURAL DS-PD06

## LED Pendant Mounts

# WAC LIGHTING

Responsible Lighting®

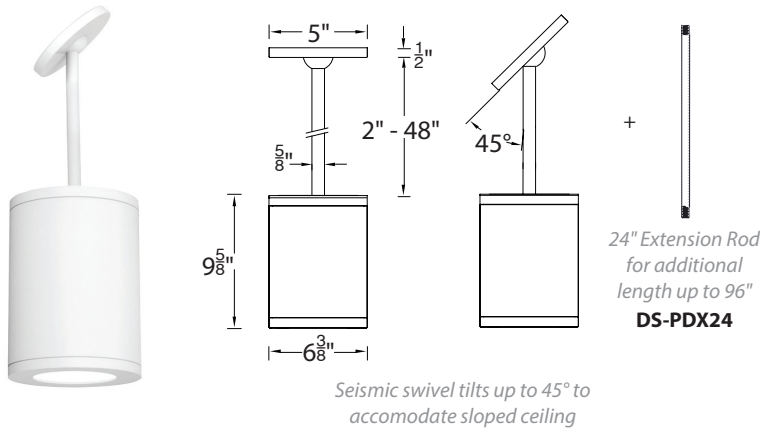

Fixture Type:

Catalog Number:

Project: \_\_\_\_\_

Location: \_\_\_\_\_

### PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cylindrical profile delivers accent and wall wash lighting. Comes in various light distribution and beam angle options.

### FEATURES

- Energy Star® rated \*(labeled with \*)
- High performance exterior rated LED pendant
- Includes 45° swivel canopy and 2 field cuttable 24" rods
- Solid aluminum construction
- 38° visual cutoff angle for glare control
- 5 year warranty

### SPECIFICATIONS

- Input:** Universal voltage 120V - 277VAC, 50/60Hz
- Dimming:** Electronic low voltage (ELV) : 100% - 5% (120V only)  
0-10V: 100% - 1% (120-277V)
- Light Source:** High output 3 Step Mac Adam Ellipse COB  
Rated life of 70,000 hours at L70
- Finish:** Electrostatically powder coated, white, black, bronze and graphite
- Standards:** IP65 rated, ETL & cETL wet location listed

### ORDERING NUMBER

Diameter	Watt	Color Temp	CRI	Lumen	CBCP	Efficacy (Lm/W)	Light Distribution	Finish	
	36W	<b>S927</b>	2700K	90	1875	8911	51		<b>BK</b> Black <b>WT</b> White <b>BZ</b> Bronze <b>GH</b> Graphite
		<b>S827*</b>	2700K	85	2400	11392	65		
		<b>S930</b>	3000K	90	2000	9500	54		
		<b>S830*</b>	3000K	85	2170	10317	59		
		<b>S835*</b>	3500K	85	2500	11884	68		
		<b>S840*</b>	4000K	85	2450	11639	66		
	36W	<b>N927</b>	2700K	90	1830	4642	49		
		<b>N827*</b>	2700K	85	2340	5935	63		
		<b>N930</b>	3000K	90	1950	4949	53		
		<b>N830*</b>	3000K	85	2120	5374	57		
<b>N835*</b>		3500K	85	2440	6191	66			
<b>N840*</b>		4000K	85	2390	6063	65			
36W	<b>F927</b>	2700K	90	1840	3310	50			
	<b>F827*</b>	2700K	85	2355	4231	64			
	<b>F930</b>	3000K	90	1965	3528	53			
	<b>F830*</b>	3000K	85	2130	3832	58			
	<b>F835*</b>	3500K	85	2455	4414	66			
	<b>F840*</b>	4000K	85	2405	4323	65			

**DS-PD06-\_\_\_\_\_ - \_\_\_\_\_**

Example: **DS-PD06-S930-WT**

wacighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760



# TUBE ARCHITECTURAL DS-PD06

## LED Pendant Mounts

# WAC LIGHTING

Responsible Lighting®

### MOUNTING ACCESSORIES

	<i>Extension Rod</i>	<b>DS-PDX24</b>	<i>One 24" extension rod for DS-PDSK Can be field cut</i>	<b>Finish</b>	
				<b>BK</b> <i>Black</i>	
				<b>WT</b> <i>White</i>	
				<b>BZ</b> <i>Bronze</i>	
				<b>GH</b> <i>Graphite</i>	

Example: **DS-PDX24-WT**

waclighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122


Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760

# TUBE ARCHITECTURAL DS-PD08

## LED Pendant Mounts

# WAC LIGHTING

Responsible Lighting®

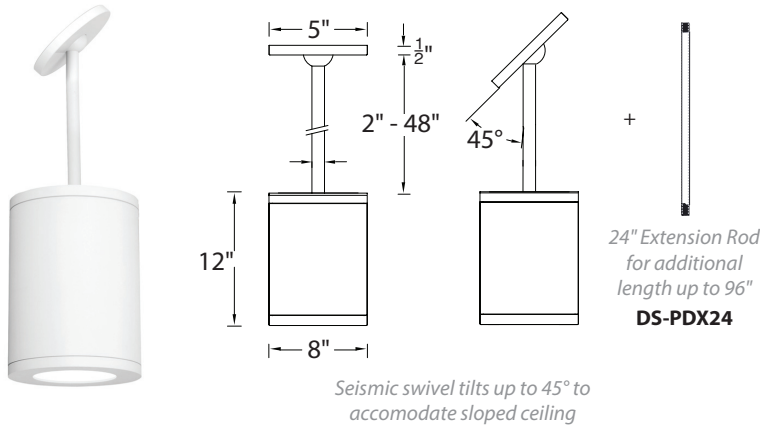

Fixture Type:

Catalog Number:

Project: \_\_\_\_\_

Location: \_\_\_\_\_

### SPECIFICATIONS

- Input:** Universal voltage 120V - 277VAC, 50/60Hz  
**Dimming:** Electronic low voltage (ELV) : 100% - 5% (120V only)  
 0-10V: 100% - 1% (120-277V)  
**Light Source:** High output 3 Step Mac Adam Ellipse COB  
 Rated life of 80,000 hours at L70  
**Finish:** Electrostatically powder coated, white, black, bronze and graphite  
**Standards:** IP65 rated, ETL & cETL wet location listed

### PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cylindrical profile delivers accent and wall wash lighting. Comes in various light distribution and beam angle options.

### FEATURES

- Energy Star® rated (labeled with \*)
- High performance exterior rated LED pendant
- Includes 45° swivel canopy and 2 field cuttable 24" rods
- Solid aluminum construction
- 43° visual cutoff angle for glare control
- 5 year warranty

### ORDERING NUMBER

Diameter	Watt	Color Temp	CRI	Lumen	CBCP	Efficacy (Lm/W)	Light Distribution	Finish
<p><b>DS-PD08</b> 8" 54W</p>		<b>S927</b> 2700K <b>S827*</b> 2700K <b>S930</b> 3000K <b>S830*</b> 3000K <b>S835*</b> 3500K <b>S840*</b> 4000K	90 85 90 85 85 85	3075 3540 2975 3615 3855 3915	11830 13616 11443 13904 14822 15054	64 74 62 75 80 82	18°	<b>BK</b> Black <b>WT</b> White <b>BZ</b> Bronze <b>GH</b> Graphite
		<b>N927</b> 2700K <b>N827*</b> 2700K <b>N930</b> 3000K <b>N830*</b> 3000K <b>N835*</b> 3500K <b>N840*</b> 4000K	90 85 90 85 85 85	3075 3540 2975 3615 3855 3915	16383 18857 15847 19255 20526 20847	64 74 62 75 80 82	21°	
		<b>F927</b> 2700K <b>F827*</b> 2700K <b>F930</b> 3000K <b>F830*</b> 3000K <b>F835*</b> 3500K <b>F840*</b> 4000K	90 85 90 85 85 85	3035 3495 2935 3570 3805 3865	6200 7136 5997 7287 7768 7890	63 73 61 74 79 81	34°	

**DS-PD08-** \_\_\_\_\_ - \_\_\_\_\_

Example: **DS-PD08-S930-WT**

wacighting.com  
 Phone (800) 526.2588  
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
 44 Harbor Park Drive  
 Port Washington, NY 11050

Central Distribution Center  
 1600 Distribution Ct  
 Lithia Springs, GA 30122

Western Distribution Center  
 1750 Archibald Avenue  
 Ontario, CA 91760


# TUBE ARCHITECTURAL DS-PD08

## LED Pendant Mounts

# WAC LIGHTING

Responsible Lighting®

### MOUNTING ACCESSORIES

	<i>Extension Rod</i>	<b>DS-PDX24</b>	<i>One 24" extension rod for DS-PDSK Can be field cut</i>	<b>Finish</b>	
				<b>BK</b> <i>Black</i>	
				<b>WT</b> <i>White</i>	
				<b>BZ</b> <i>Bronze</i>	
				<b>GH</b> <i>Graphite</i>	

Example: **DS-PDX24-WT**

waclighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760