


GINKGO - glass model: G538

Wall Sconce Systems

WAC LIGHTING

Responsible Lighting®

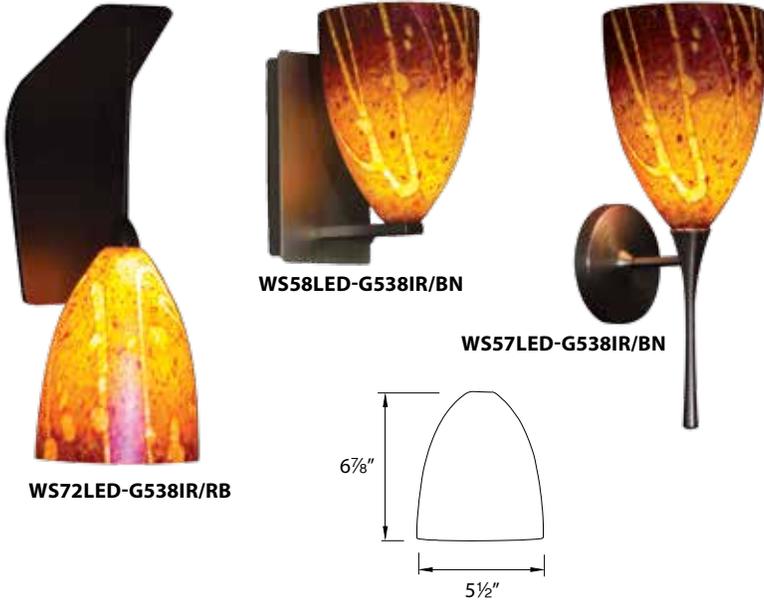

Fixture Type:

Catalog Number:



Project: _____

Location: _____

PRODUCT DESCRIPTION

Hand painted background of blue, green, rose and gold shades shimmer on this unique glass pendant. When illuminated, the iridescent backdrop seems to disappear and the patterns float tone on tone.



Shades are configurable with three sconce options available in Chrome, Brushed Nickel & Rubbed Bronze finishes. Choose shade, shade color, sconce, and sconce finish. All Bi-Pin socket sets can accept an LED Bi-Pin (**JCLEL-2-30-WT** - order separately). All sconces come with an electronic transformer and are available with LED lamping.

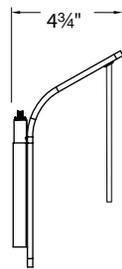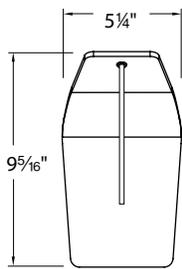

Model: WS72LED
Lamping: 12V LED Socket Sets
Power: 4W
Lumens: 330
Color Temp: 3000K
CRI: 85
Dim: 100% - 10%

WS72
 12V Halogen Socket Sets
 50W max



Compatible with all Quick Connect™ Pendants under 6" in diameter

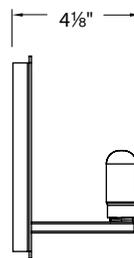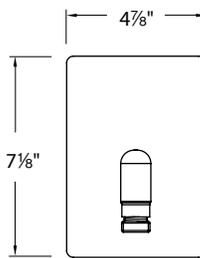

Model: WS58LED
Lamping: Integral LED
Power: 6W
Lumens: 305
CCT: 3000K
CRI: 85
Dim: 100% - 10%

WS58
 12V Halogen/Xenon
 50W max

Accommodates any 500 series glass under 6" in diameter




Model: WS57LED
Lamping: Integral LED
Power: 6W
Lumens: 305
CCT: 3000K
CRI: 85
Dim: 100% - 10%

Accommodates any 500 series glass under 6" in diameter

ORDER NUMBER

Sconce Model	Lamping	Shade Model	Shade Color	Sconce Finish
WS72LED	12V LED Socket Set			
WS72	12V Halogen Socket Set			
WS57LED	Integral LED	G538	Ginkgo	IR Iridescent
WS58LED	Integral LED			BN Brushed Nickel CH Chrome RB Rubbed Bronze
WS58	12V Halogen Bi-Pin			

SCONCE FINISHES



- **G538** **IR** /

Example: WS58LED-G538IR/BN

WAC Lighting
 www.waclighting.com
 Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive • Port Washington, NY 11050
 Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center
 1750 Archibald Avenue • Ontario, CA 91760
 Phone (800) 526.2588 • Fax (800) 526.2585