

RHEA - glass model: G599

Wall Sconce Systems

WAC LIGHTING

Responsible Lighting®

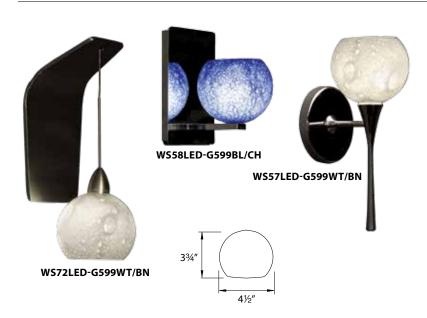




PRODUCT DESCRIPTION


Rhea is mouth blown cased glass. The white color is a soda dip resulting in a unique air bubble effect, giving the glass a textured look with a smooth, glossy surface. The blue is textured and mottled with various size and color frits, incorporating hues and subtle textures that vary in shade and intensity with changes in light.

Shades are configurable with three sconce options available in Chrome, Brushed Nickel & Rubbed Bronze finishes. Choose shade, shade color, sconce, and sconce finish. All Bi-Pin socket sets can accept an LED Bi-Pin (JCLED-2-30-WT - order separately). All sconces come with an electronic transformer and are available with LED lamping.




Model:	WS72LED	WS72
Lamping:	12V LED Socket Sets	_
		Socket Sets
Power:	4W	50W max
Lumens:	330	
Color Temp:	3000K	
CRI:	85	
Dim:	100% - 10%	

Compatible with all Quick Connect™ Pendants under 6" in diameter



Model: WS58LED **Lamping:** *Integral LED* Power: 6W 305 Lumens: CCT: 3000K CRI: 85 Dim: 100% - 10%

Accommodates any 500 series glass under 6" in diameter



Model: WS57LED **Lamping:** Integral LED Power: 6W 305 Lumens:

CCT: 3000K CRI: 85

Dim: 100% - 10%

Accommodates any 500 series glass under 6" in diameter

ORDER NUMBER

Sconce Model	Lamping	Shade Mode	el	Shac	le Color	Scor	nce Finish
WS72LED WS72 WS57LED WS58LED WS58	12V LED Socket Set 12V Halogen Socket Set Integral LED Integral LED 12V Halogen Bi-Pin	G599 Rhe	а	BL WT	Blue White	BN CH RB	Brushed Nickel Chrome Rubbed Bronze

G599

Example: WS58LED-G599BL/CH

RΙ WT **SCONCE FINISHES** RB

SHADE COLORS

12V Halogen/Xenon

50W max





WAC Lighting www.waclighting.com Phone (800) 526.2588 • Fax (800) 526.2585 Headquarters/Eastern Distribution Center 44 Harbor Park Drive • Port Washington, NY 11050 Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center 1750 Archibald Avenue • Ontario, CA 91760 Phone (800) 526.2588 • Fax (800) 526.2585