


HR-3LED-T418

3.5" Tesla™ LED 30°-45° Adjustable Trim

WAC LIGHTING

Responsible Lighting®

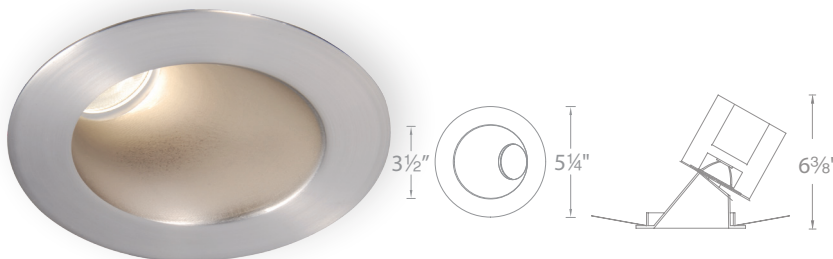

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Minimum profile, round 30° to 45° adjustable trim with interior open reflector.

FEATURES

- 3.5" aperture
- Damp location listed
- 30° visual cutoff angle for glare control
- Adjustable fixtures are ideal for sloped ceiling applications
- 50,000 hour rated life
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction: Durable die-cast aluminum construction with borosilicate glass lens. Extruded aluminum heat sink.

Power Consumption: 17W




Dimming: 0-10V Dimming: 100%-1%
ELV Dimming: 100%-5% (120V only)

Mounting: Two heavy gauge retention clips hold trim firmly to housing.

Finish: Powder coated white
Electroplated brushed nickel and copper bronze

Standards: ETL & cETL Listed.

TRIMS

Model#	Beam	Color Temp	CRI	Lumens	CBCP	Finish
HR-3LED-T418 30° to 45° Adjustable	S 15°	27 2700K	85	765	2998	BN Brushed Nickel  CB Copper Bronze  WT White 
		W 3000K	85	820	3213	
		9W 3000K	90	580	2280	
		35 3500K	85	830	3250	
		C 4000K	85	850	3335	
	N 30°	27 2700K	85	695	1809	
		W 3000K	85	740	1939	
		9W 3000K	90	525	1376	
		35 3500K	85	750	1964	
		C 4000K	85	770	2013	
	F 40°	27 2700K	85	765	1828	
		W 3000K	85	810	1959	
		9W 3000K	90	580	1390	
		35 3500K	85	825	1982	
		C 4000K	85	850	2034	

HR-3LED-T418 - -

Example: HR-3LED-T418F-C-BN

COMPATIBLE HOUSINGS See individual housing spec sheets for complete information.

New Construction

HR-3LED-H18D1-ICA Narrow, IC-Rated, Airtight	120V -277V	HR-3LED-H18D1-ICAC Narrow, IC-Rated, Airtight Chicago Plenum	120V -277V
HR-3LED-H18D-ICA IC-Rated, Airtight	120V -277V	HR-3LED-H18D-ICAC IC-Rated, Airtight Chicago Plenum	120V -277V
HR-3LED-H18D-EMICA IC-Rated, Airtight Emergency Backup Battery	120V	HR3LED-H18D-EMICAF IC-Rated, Airtight Emergency Backup Battery	277V

Remodel

HR-3LED-R22D Non-IC	120V -277V
-------------------------------	------------

REPLACEMENT MODULES

Reflectors

Spot	SL-REF-BL08-1-S
Narrow Flood	SL-REF-BL08-1-N
Flood	SL-REF-BL08-1-F

LED

2700K	85 CRI	4BXXRE-27E0800
3000K	85 CRI	4BXXRE-30E0800
3000K	90 CRI	4BXXRE-30G0800
3500K	85 CRI	4BXXRE-35E0800
4000K	85 CRI	4BXXRE-40E0800

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760