


HR-LED421

4" LEDme® Step Baffle Downlight Trim

WAC LIGHTING

Responsible Lighting®

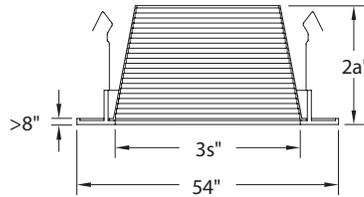

Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION

Round recessed trim with interior step baffle.
For use with HR-LED418 series housings.

FEATURES

- Less than 8" thick, super low profile die-cast aluminum trim
- Recessed depth from LEDs to trim edge is 2a"
- Narrow flood beam spread
- Deep regression produces a very low glare with 40° cut-off angle
- Handles surfaces up to w" thick
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction: Durable die-cast aluminum construction.
Three heavy gauge retention clips firmly hold trim to housing.

Light Source: Utilizes six 3W LED's (included with housing).
See individual housing for wattage rating.

Finish: Powder coat paint or plated metal finish.
Available in White baffle w/White trim (WT/WT).

Standards: UL & CUL Listed.


ORDER NUMBER

| Model # | Finish | Baffle/Trim |
|-----------|--------|-------------|
| HR-LED421 | WT/WT | White/White |

HR-LED421 – **WT/WT**

Example: HR-LED421-WT/WT

PHOTOMETRY



Beam Angle: 31.4°

COMPATIBLE HOUSINGS (ORDER SEPARATELY)

| Rating | Model # | Installation | Color Temp | Watt | Lumens | CRI | Input | Current | Dimensions | Cutout |
|----------|---------------|---|------------|--------|--------|-----|-----------------|---------|----------------------------|--------|
| IC-Rated | HR-LED418-NIC | New Construction | 27 2700K | 10.2W | 639 | 85 | 120V 50/60Hz | 450mA | L: 142-242" W: 6w" H: 52" | 4a" |
| | | | 30 3000K | | 639 | 85 | | | | |
| | HR-LED418-RIC | Remodel | 35 3500K | | 681 | 80 | | | L: 11d" W: 6a" H: 5s" | 4a" |
| Non-IC | HR-LED418-N | New Construction | 27 2700K | 16W | 846 | 85 | 120V 50/60Hz | 700mA | L: 142-242" W: 6w" H: 52" | 4a" |
| | | | 30 3000K | | 846 | 85 | | | | |
| | HR-LED418-R | Remodel | 35 3500K | | 901 | 80 | | | L: 11d" W: 6a" H: 5s" | 4a" |
| Non-IC | HR-LED418-N | New Construction Emergency Backup Battery | 27 2700K | EM 16W | 846 | 85 | 120V 50/60Hz | 700mA | L: 142-242" W: 118" H: 52" | 4a" |
| | | | 30 3000K | | 846 | 85 | | | | |
| | | | 35 3500K | | 901 | 80 | | | | |
| | | | 40 4000K | | 1135 | 75 | | | | |

Example: HR-LED418-NIC-27 or HR-LED418-NIC-27-EM

See individual housing spec sheets for complete information.

WAC Lighting

www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center

1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585