


# HR3LEDT618P

## Tesla Pro LED 0°-30 Adjustable Pin Hole Trim

# WAC LIGHTING

Responsible Lighting®

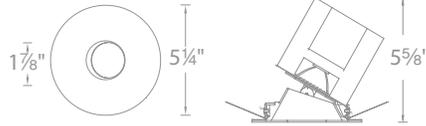

Fixture Type:

Catalog Number:

Project:

Location:

### PRODUCT DESCRIPTION

Minimum profile, 0° to 30° adjustable pin hole trim with interior open reflector

### FEATURES

- 1 7/8" aperture
- Adjustment allows for accent lighting wall art
- Adjustable fixtures are ideal for sloped ceiling applications
- 50,000 hour rated life
- 5 year WAC Lighting product warranty

### SPECIFICATIONS

**Construction:** Durable die-cast aluminum construction with borosilicate glass lens. Extruded aluminum heat sink.

**Power Consumption:** Up to 22W

**Dimming:** 0-10V Dimming: 100%-0%  
ELV Dimming: 100%-5% (120V only)

**Mounting:** Two heavy gauge retention clips hold trim firmly to housing.

**Finish:** Powder coated white  
Electroplated brushed nickel and copper bronze

**Standards:** ETL & cETL Damp Location Listed.

### TRIMS

Model#	Beam	Color Temp	CRI	Lumens	CBCP	Finish
<b>HR3LEDT618PS</b> Round Pin Hole 0° to 30° Adjustable	15°	<b>827</b> 2700K	85	400	2841	<b>BN</b> Brushed Nickel <b>CB</b> Copper Bronze <b>WT</b> White
		<b>927</b> 2700K	90	335	2387	
		<b>830</b> 3000K	85	430	3045	
		<b>930</b> 3000K	90	305	2160	
		<b>835</b> 3500K	85	435	3080	
		<b>840</b> 4000K	85	475	3161	

### HR3LEDT618PS

Example: HR3LEDT618PS930BN

**COMPATIBLE HOUSINGS** See individual housing spec sheets for complete information.

#### New Construction

<b>HR-3LED-H18D1-ICA</b> Narrow, IC-Rated, Airtight	120V -277V	<b>HR-3LED-H18D1-ICAC</b> Narrow, IC-Rated, Airtight Chicago Plenum	120V -277V
<b>HR-3LED-H18D-ICA</b> IC-Rated, Airtight	120V -277V	<b>HR-3LED-H18D-ICAC</b> IC-Rated, Airtight Chicago Plenum	120V -277V
<b>HR-3LED-H18D-EMICA</b> IC-Rated, Airtight Emergency Backup Battery	120V	<b>HR3LED-H18D-EMICAF</b> IC-Rated, Airtight Emergency Backup Battery	277V
<b>HR-3LED-H18D-A</b> New Construction Non-IC, Airtight No Adjustment	120V-277V	<b>HR3LED-H22D-A</b> Non-IC, Airtight No Adjustment	120V -277V
		<b>HR-3LED-H15D-ICA</b> IC-Rated, Airtight No Adjustment	120V -277V

#### Remodel

<b>HR-3LED-R18D-A</b> Non-IC, Airtight No Adjustment	120V -277V	<b>HR-3LED-R22D</b> Non-IC	120V -277V
--	------------	-------------------------------	------------

waclighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive

Port Washington, NY 11050

Central Distribution Center

1600 Distribution Ct

Lithia Springs, GA 30122

Western Distribution Center

1750 Archibald Avenue

Ontario, CA 91760