

# PIXELS

## Configurable LED Light Sheet

# WAC LIGHTING

Responsible Lighting®



Fixture Type:

Catalog Number:

Project: \_\_\_\_\_

Location: \_\_\_\_\_

### PRODUCT DESCRIPTION

Professional flexible light sheet creates uniform and linear illumination. Easy installation in any minimal size application with no heat sink needed.

### FEATURES


- With a lightweight, ultra-thin 1/8" profile
- Even illumination of translucent surfaces from as little as 1/2" behind
- May be field-cut vertically or horizontally, in unique shapes or around obstructions
- Powers easily by daisy chaining with integral push-in connectors or power from any square at soldering points provided
- Versatile Mounting Options:  
3M-construction adhesive adheres to most surfaces (flat or curved), or open rectangles indicate where it can be stapled through
- Can be installed in either exposed or fully enclosed spaces
- Specially rated for installation in the storage area of a clothes closet

### SPECIFICATIONS

- Power Supply:** Remote and electronic Class 2 DC power supply  
120-277VAC 50/60Hz input, up to 96W output
- Light Source:** 144 LEDs/sq ft (1 inch pitch)
- Dimming:** May be dimmed with electronic 0-10V dimmer.
- Operating Temp:** -4°F to 104°F (-20°C to 40°C) at relative humidity 95%
- Standards:** UL & CUL Listed for dry and damp locations.

Model	Dimension	LED Lumens	Watt	Color Temp	Color
<b>LED P05 P10</b>	<b>1224</b> 12" x 24"	500 lm/sq ft	5W/sq ft	<b>27</b> 2700K	White
		1000 lm/sq ft	10W/sq ft	<b>30</b> 3000K	
				<b>35</b> 3500K	
				<b>40</b> 4000K	
				<b>50</b> 5000K	

**LED-P \_\_\_ -1224- \_\_\_**  
Example: LED-P10-1224-30

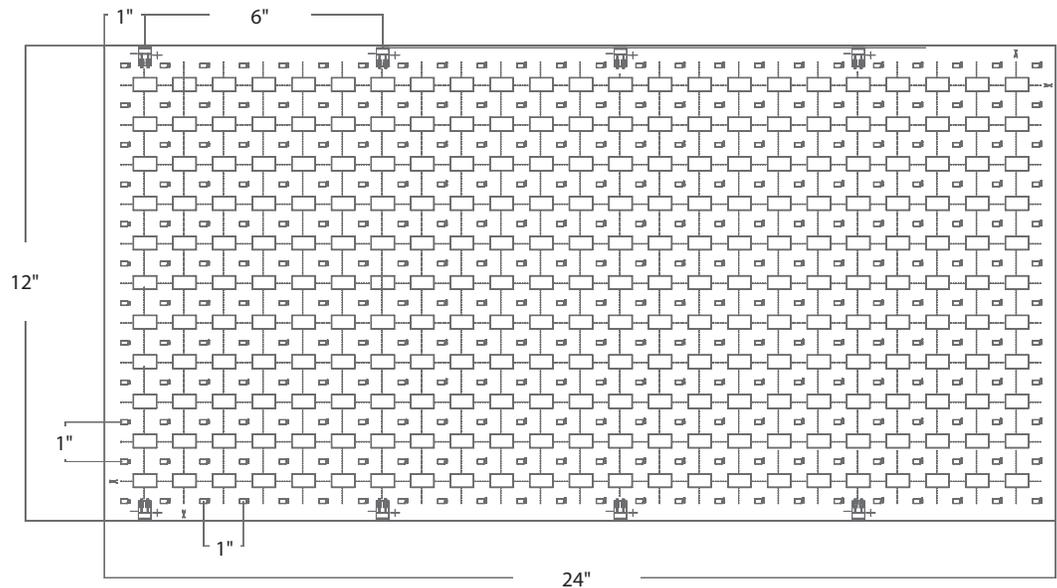

wacighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760

# PIXELS

## Configurable LED Light Sheet

# WAC LIGHTING

Responsible Lighting®

### Required

Type	Model	Input	Output	Max Coverage	Dim
Remote	 <b>EN-24100-277-RB2</b>	120-277VAC	24VDC / 96W Class 2	20 sqft (P05) 10 sqft (P10)	0-10V <i>Includes a 6 foot lead wire</i>
Wall Dimmer & Driver	 <b>EN-D24100-120-R</b>	120VAC	24VDC / 96W Class 2	20 sqft (P05) 10 sqft (P10)	<i>Integral</i>

waclighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760