

R-501-R-UA

5" Line Voltage Remodel Housing

120V – Airtight Ready

WAC LIGHTING

Responsible Lighting®




Fixture Type:

Catalog Number:

Project: _____

Location: _____

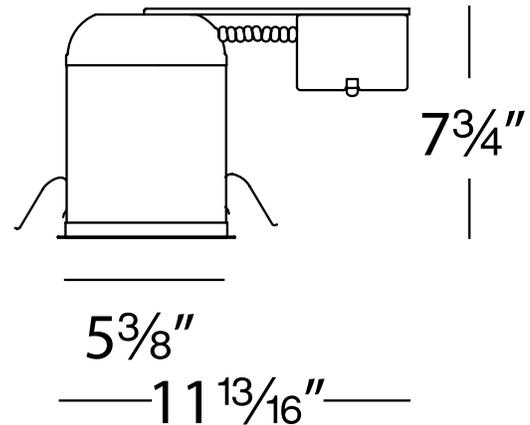

PRODUCT DESCRIPTION

Line voltage remodel housing.

FEATURES

- Cutout: 5 1/16"
- Suitable for direct contact with insulation
- Thermal protector (included) protects against over-lamping
- Certified airtight per ASTM E283, when used with RGK gasket kit
- Rated for branch and chain wiring
- J-Box and transformer accessible through ceiling

ORDER NUMBER

R-501-R-UA

SPECIFICATIONS

Construction: Housing is 20 gauge steel, painted white. Frame, junction box is heavy gauge galvanized steel.

J-Box: Seven knockouts and four Romex® style wiring connectors provided for ease of installation. Rated for branch and chain wiring.

Mounting: Clips allow easy removal of housing. Accommodates surface thickness of up to 3/4".

Rating: IC/Non-IC rated. When direct insulation contact, follow lamp type and maximum wattage information listed on the IC label in the housing. When Non-direct insulation contact, follow lamp type and maximum wattage information listed on the NON-IC label, which requires 3" clearance on all sides from any insulation.

Standards: UL & CUL Listed. Suitable for damp locations.

COMPATIBLE TRIMS

Model	Description	Finish – (where there is a slash (/) the letters correspond as: interior finish/exterior finish)
R-521	Round Open Reflector Trim	Specular Clear/White (CL/WT)
R-520	Round Step Baffle Trim	Brushed Nickel (BN), Copper Bronze (CB), and White (WT/WT)
R-532	Gimbal Ring 20° Adjustment From Vertical	Brushed Nickel (BN) and White (WT)
R-522	Shower Light with Glass Lens	White (WT)

See individual trim spec sheets for complete information.

WAC Lighting

www.waclighting.com

Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050

Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center

1750 Archibald Avenue • Ontario, CA 91760

Phone (800) 526.2588 • Fax (800) 526.2585