


R-602D-N-ICA

6" Line Voltage New Construction Housing
120V – IC Rated – Airtight Ready

WAC LIGHTING
Responsible Lighting®

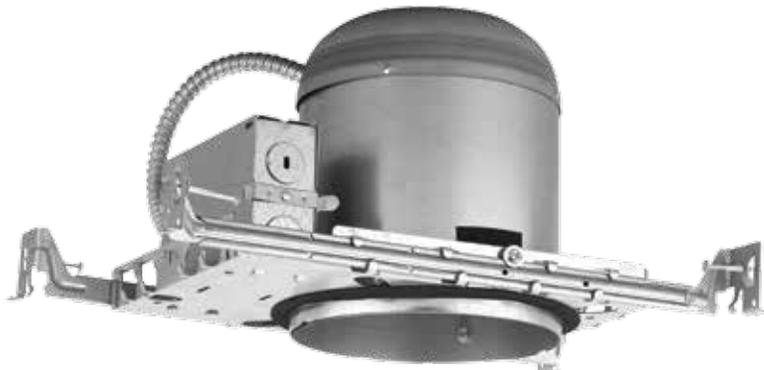


Fixture Type:

Catalog Number:

Project: _____

Location: _____

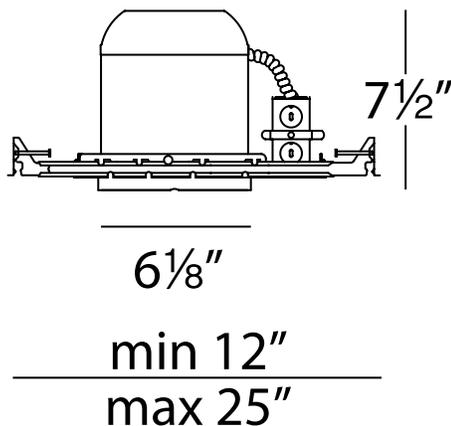

PRODUCT DESCRIPTION

Line voltage new construction housing.

FEATURES

- Cutout: 6 7/16"
- Suitable for direct contact with insulation
- Thermal protector (included) protects against over-lamping
- Certified airtight per ASTM E283, when used with RGK gasket kit
- Rated for branch and chain wiring
- Hanger bars slots are located on all four sides of the frame

ORDER NUMBER

R-602D-N-ICA

SPECIFICATIONS

Construction: Housing is 20 gauge steel, painted white. Frame, junction box and hanger bars are heavy gauge galvanized steel.

J-Box: Seven knockouts and four non-metallic sheathed cable style wiring connectors provided for ease of installation. Rated for branch and chain wiring.

Mounting: Supplied with hanger bars, adjustable from 12"-24" to accommodate various joist construction and grid sizes. Hanger bars include a captive mounting "screw-nail" for ease of installation. Accommodates surface thickness of up to 3/4".

Rating: IC-Rated for direct contact with insulation.

Standards: UL & CUL Listed. Suitable for damp locations.

COMPATIBLE TRIMS

Model	Description	Finish – (where there is a slash (/) the letters correspond as: interior finish/exterior finish)
R-656	Round Open Reflector Trim	Specular Clear/White (CL/WT)
R-620	Round Step Baffle Trim	Brushed Nickel (BN), Copper Bronze (CB), and White (WT/WT)
R-633	Gimbal Ring 20° Adjustment From Vertical	Brushed Nickel (BN) and White (WT)
R-651	Shower Light with Glass Lens	White (WT)

See individual trim spec sheets for complete information.

WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center
1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585