


## 6" LINE VOLTAGE DOWNLIGHTS

## R-F608D-R-A

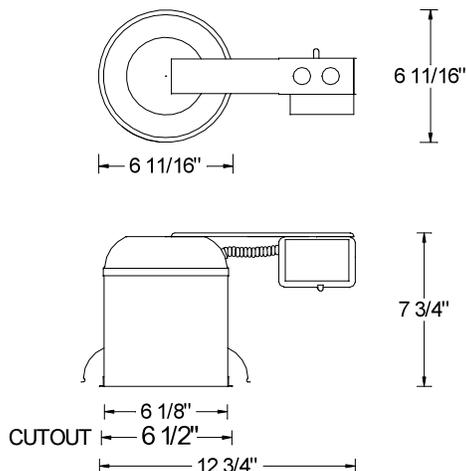

### Ordering Matrix

| Model  | Installation Type | Options       |
|--|-------------------|---------------|
| [ ]  | [ ]               | [ ]           |
| R-F608D: Recessed 6inch compact fluorescent downlights | R-Remodel Housing | A : Air Tight |

Example: R-F608D-R-A

### Product Details

|                     |   |
|---------------------|---|
| <b>Description:</b> | Line voltage remodel housing.   |
| <b>Materials:</b>   | Housing is 20 gauge steel, painted white. Frame, junction box is heavy gauge galvanized steel.  |
| <b>Mounting:</b>    | Clips allow easy removal of housing. Accommodates surface thickness of up to 1". 6 1/2" cutout hole.  |
| <b>Ratings:</b>     | Non-IC rated. Insulation must be kept at least 3" away from the housing.  |
| <b>J-Box:</b>       | Seven knockouts and four Romex® style wiring connectors provided for ease of installation. Rated for branch and chain wiring.                                     |
| <b>Ballast:</b>     | Rated Lamp Watts: 32W<br>Voltage: 120V<br>Input Current: 0.38A<br>Input Power (ANSI Watts): 27W<br>Minimum 2 years warranty from the manufacturer of the ballast. |
| <b>Lamp:</b>        | Single compact fluorescent lamp.<br>CFTR32W/GX24q/830, 3000K<br>Lamps are ordered separately.   |
| <b>Listing:</b>     | UL & CUL Listed. Suitable for damp locations.   |

### Specification Features

|  |
|--|
| <ul style="list-style-type: none"> <li>ENERGY STAR qualified.</li> <li>Visit <a href="http://www.waclighting.com">www.waclighting.com</a> for compatible trims.</li> <li>Certified Air Tight per ASTM E283.</li> <li>5 year W.A.C. Lighting product warranty.</li> </ul> |
|--|