

# 3.5" OCULUX ARCHITECTURAL

Wall Wash - R3CRWT, R3CRWL

# WAC LIGHTING

Responsible Lighting®



Fixture Type:

Catalog Number:

Project:

Location:

## PRODUCT DESCRIPTION

Oculux Architectural offers performance features in a simple but versatile package for residential and commercial applications alike. One housing can be used for downlight, adjustable, pinhole, wall wash trims.

## FEATURES

- 3 beam angle options included: For Wall Wash trim optimal optics is light engine with no film installed.
- IC-Rated, Airtight, New Construction
- Adjustable LED light engine included with housing
- Shallow housing under 4" depth
- 5 year warranty

## SPECIFICATIONS

**Construction:** Die-cast aluminum trim and heat sink

**Dimming:** 100% - 1% TRIAC, ELV  
100% - 5%, 0-10V

**Input Power:** 13.5W, 120V-277V 50/60Hz

**Light Source:** High output COB LED rated life of 50,000 hours.

**Mounting:** Retention clips firmly hold trim to housing. Cutout 4¼"

**Finish:** Powder coated white, enamel-coated haze.

**Ceiling thickness:** ½" - 1"

**Standards:** UL & cUL, Wet location listed. Title 24 JA8-2016 Compliant

**Operating Temperature:** -4°F to 104°F (-20°C to 40°C)

Trims (Order Housing Separately)	Model	Beam	Color Temp	Lumens	CBCP	Finish
	<b>R3CRWT</b> <i>Round Trim</i> <i>Wall Wash</i>	Asymmetrical	927 2700K 930 3000K 935 3500K 940 4000K	590 635 650 680	N/A	<b>HZWT</b> Haze/White <b>WT</b> White
	<b>R3CRWL</b> <i>Round Trimless</i> <i>Wall Wash</i>	Asymmetrical	927 2700K 930 3000K 935 3500K 940 4000K	590 635 650 680	N/A	<b>HZ</b> Haze <b>WT</b> White

## R3CRW\_\_ -

Example: R3CRWT-WT

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive

Port Washington, NY 11050

Central Distribution Center

1600 Distribution Ct

Lithia Springs, GA 30122

Western Distribution Center

1750 Archibald Avenue

Ontario, CA 91760

# 3.5" OCULUX ARCHITECTURAL Wall Wash - R3CRWT, R3CRWL


WAC LIGHTING  
Responsible Lighting®

Housings (Required) - Order separately from trims

Model

Color Temp

Input

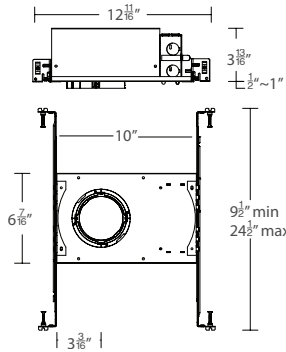

**R3CRN-11**  
IC-Rated, Airtight  
New Construction

Model	Color Temp	Input
927	2700K	120V - 277V
930	3000K	
935	3500K	
940	4000K	

Example: **R3CRN-11-927**

**GLARE CONTROL ACCESSORIES** sold separately

LENS-16	HCL	Honeycomb Louver

**LENS ACCESSORIES** sold separately

LENS-16	AMB	Amber
	RED	Red
	FR	Frosted
	SPR	Spread
	BEL	Beam Elongating

## FEATURES

- Adjustable LED light engine included with housing:  
Optimal Vertical Adjustment for Wall Wash is 15° indexed position
- Trim or trimless with die-cast spackle frame included.
- Accepts one optional honeycomb louver or optical lens.

waclighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760