


WAC LIGHTING

Responsible Lighting®

44 Harbor Park Drive
 Port Washington, NY 11050
 Tel: 800.526.2588
 www.waclighting.com

5" PREMIUM DOWNLIGHT TRIM

R5VT-21

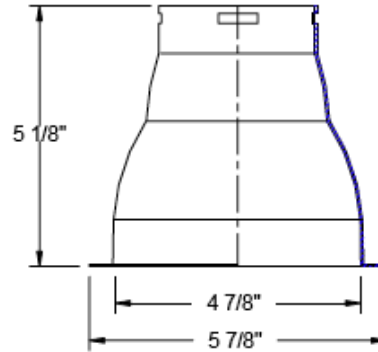

| Ordering Matrix | | |
|-----------------|--------------|--------|
| Series | Model Number | Finish |
| [] | [] | [] |
| R5VT | 21 | SC |


Ordering Example (series – model number – finish): R5VT-21-SC

| Product Details | Specification Features |
|--|--|
| <p>Application: Ceiling down light trim, 1-inch maximum ceiling thickness. Provides smooth broad area illumination without shadows. Used with incandescent or fluorescent lamp housings.</p> <p>Materials: One-piece spun aluminum construction. Integral trim ring is painted white, interior reflector is anodized aluminum. Trim is retained to socket via spring clips.</p> <p>Finish: SC = Specular Clear baffle with White trim</p> <p>Ratings: UL & CUL listed.</p> | <ul style="list-style-type: none"> Suitable for damp locations 5 year WAC Lighting product warranty. |

| Compatible Housings (sold separately) | | | | | |
|--|--|--|--|--|--|
| <p>R5VI-ICA Insulation Contact & Air Tight New Construction Incandescent Lamp: PAR30 50W</p> | | <p>R5VI-R-ICA Insulation Contact & Air Tight Remodeling Incandescent Lamp: PAR30 50W</p> | | <p>R5VI Non IC Frame-in Style New Construction Incandescent Lamp: A19 100W PAR30L 75W</p> | |
| <p>R5VF-113Q Non IC Frame-in Style New Construction Fluorescent Lamp: Quad 13W G24Q-1</p> | | <p>R5VF-126/32T Non IC Frame-in Style New Construction Incandescent Lamp: Tri-tube 26/32W GX24Q-3</p> | | | |

5" PREMIUM DOWNLIGHT TRIM

R5VT-21

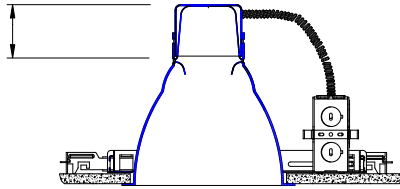

Socket cup adds a maximum of 2 1/8" to the height of the trim when used with frame in kits.