


WAC LIGHTING

Responsible Lighting®

44 Harbor Park Drive
 Port Washington, NY 11050
 Tel: 800.526.2588
 www.waclighting.com

5" PREMIUM DOWNLIGHT TRIM

R5VT-23

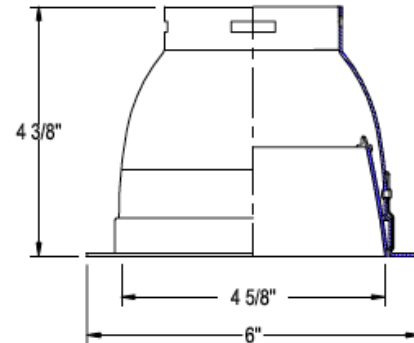

Ordering Matrix			
Series	Model Number	Finish	
R5VT	23	SC	WT

Ordering Example (series – model number – finish): R5VT-23-SC

Product Details		Specification Features	
Application:	Ceiling down light trim, 1-inch maximum ceiling thickness. Provides smooth broad area illumination without shadows. Used with incandescent or fluorescent lamp housings.	•	Suitable for damp locations
Materials:	One-piece spun aluminum construction. Integral trim ring is painted white, interior reflector is anodized aluminum. Trim is retained to socket via spring clips.	•	5 year WAC Lighting product warranty.
Finish:	SC = Specular Clear baffle with White trim WT = White with White trim		
Ratings:	UL & CUL listed.		

Compatible Housings (sold separately)					
R5VI-ICA Insulation Contact & Air Tight New Construction Incandescent Lamp: PAR30 50W		R5VI-R-ICA Insulation Contact & Air Tight Remodeling Incandescent Lamp: PAR30 50W		R5VI Non IC Frame-in Style New Construction Incandescent Lamp: A19 75W PAR30L 75W	


WAC LIGHTING

Responsible Lighting®

44 Harbor Park Drive
 Port Washington, NY 11050
 Tel: 800.526.2588
 www.waclighting.com

5" PREMIUM DOWNLIGHT TRIM R5VT-23

<p>R5VI-S-ICA Insulation Contact & Air Tight Shallow New Construction Incandescent Lamp: PAR30 50W</p>		<p>R5VI-S-R-ICA Insulation Contact & Air Tight Shallow Remodeling Incandescent Lamp: PAR30 50W</p>		<p>R5VF-113Q Non IC Frame-in Style New Construction Fluorescent Lamp: Quad 13W G24Q-1</p>	
<p>R5VF-126/32T Non IC Frame-in Style New Construction Incandescent Lamp: Tri-tube 26/32W GX24Q-3</p>					

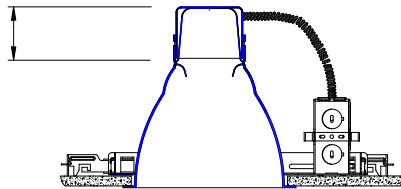

Socket cup adds a maximum of 2 1/8" to the height of the trim when used with frame in kits.