




Fixture Type:

Catalog Number:

Project:

Location:

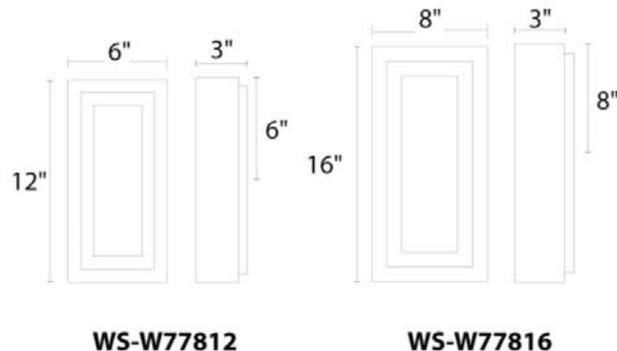

PRODUCT DESCRIPTION

Edge-mounted LED modules stream powerful light into an innovative extraction panel, which then projects outward through the diffuser for a beautiful illumination framed in a black-finished aluminum shadow box.

FEATURES

- Customizable - contact factory for options
- UV-rated double-layer acrylic/PC diffuser, additional etched glass diffuser at bottom for downlight
- Universal voltage driver (120V-220V-277V) concealed within fixture
- ADA Compliant

SPECIFICATIONS

- Color Temp:** 3000K
- CRI:** 90
- Dimming:** 100% - 10% ELV
- Rated Life:** 50,000hrs*
- Input:** 120V -277V
- Construction:** Aluminum with acrylic / polycarbonate diffuser
- Finish:** Black
- Standards:** ETL & cETL listed, Wet listed

ORDER NUMBER

Model	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W77812	12" 20W	120V-277V	1061	743	BK <i>Black</i> 
WS-W77816	16" 27W		1400	980	

Example: WS-W77816-BK

dweLED.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760