


5" PREMIUM LINE VOLTAGE DOWNLIGHT HOUSING

R5VI-S-R-ICA

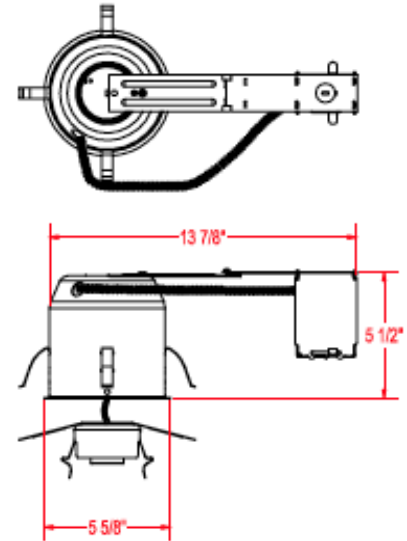

Ordering Matrix

Series	Housing Type
[]	[]
R5VI-S-R – Shallow Depth, Remodel Housing	ICA – Insulation Contact & Air Tight

Ordering Example (series – housing type): R5VI-S-R-ICA

Product Details

Application:	Shallow remodeling housing suitable for insulation contact. Companies with requirements for Washington State Energy Code (WESC) for air tight housings (when installed as instructed with option gasket kit "RGK"). Maximum 1 inch ceiling thickness.
J Box:	Junction box is accessible from above or below the ceiling. Supplied with eight standard knockouts and four integral non-metallic sheathed cable clamps. Spring loaded door, for easy access to wiring. Approved for through branch wiring.
Mounting:	Housing retained to ceiling with four spring clips. Removable for junction box access.
Material:	20 gauge galvanized steel. Ceramic/nickel-plated socket.
Ratings:	UL & CUL listed.

Specification Features

- Refer to WAC Lighting website for compatible trim
- Suitable for damp locations.
- 5 year WAC Lighting product warranty.