
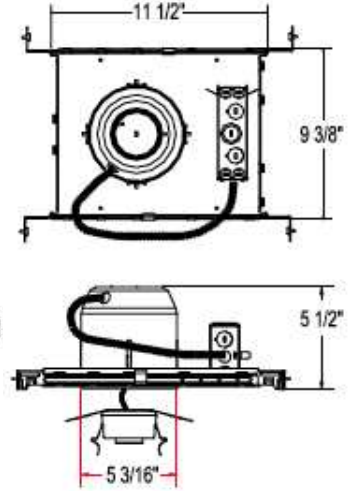


<b>CATALOG NUMBER</b>	<b>TYPE</b>
<b>PROJECT</b>	

**5" PREMIUM LINE VOLTAGE DOWNLIGHT HOUSING** **R5VI-S-ICA**

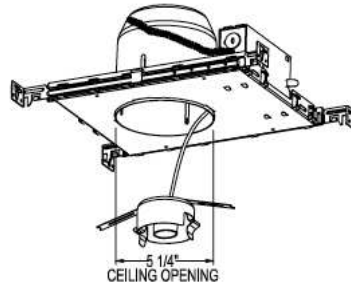

Ordering Matrix	
Series	Housing Type
[ ]	[ ]
<b>R5VI-S – Shallow Depth Housing</b>	<b>ICA – Insulation Contact &amp; Air Tight</b>

Ordering Example (series – housing type): R5VI-S-ICA

Product Details	
<b>Application:</b>	Shallow new construction housing suitable for insulation contact. Companies with requirements for Washington State Energy Code (WESC) for air tight housings (when installed as instructed with option gasket kit "RGK"). Maximum 1 3/4 inch ceiling thickness.
<b>J Box:</b>	Junction box is accessible from above or below the ceiling. Supplied with eight standard knockouts and four integral non-metallic sheathed cable clamps. Spring loaded door, for easy access to wiring. Approved for through branch wiring.
<b>Mounting:</b>	Supplied with hanger bars adjustable to 25" Bars have score lines and can be cut to accommodate 12" joist spans. Bars have notches for easy installation on T-bars. Hanger bars mount on all four sides.
<b>Material:</b>	20 gauge galvanized steel. Ceramic/nickel-plated socket.
<b>Ratings:</b>	UL & CUL listed.

Specification Features
<ul style="list-style-type: none"> <li>Suitable for damp locations.</li> <li>5 year WAC Lighting product warranty.</li> </ul>

<b>CATALOG NUMBER</b>	<b>TYPE</b>
<b>PROJECT</b>	

**5" PREMIUM LINE VOLTAGE DOWNLIGHT HOUSING** **R5VI-S-ICA**

<b>Compatible Trims (Sold Separately):</b>					
<b>R5VT-22 Open Reflector Trim</b>			<b>R5VT-23 Aperture Cone Trim</b>		
Finish	Interior		Trim	Finish	
WT	White	White	SBK	Specular Black	White
			SC	Specular Clear	White
			WT	White	White
<b>R5VT-24 Step Baffle Trim</b>			<b>R5VT-25 Step Baffle Trim</b>		
Finish	Interior		Trim	Finish	
BK	Black	White	WT	White	White
WT	White	White			