


615 South Street Garden City, NY 11530 Tel:516-515-5000 Fax:516-515-5050 www.waclighting.com

CATALOG NUMBER	<u>TYPE</u>
PROJECT	

LOW VOLTAGE TRACK LUMINAIRE

IMPULSE 896





Ordering Matrix	_	
Model	Series	Finish
JHT LHT HHT	896 896L	BK = Black WT = White

Ordering Example (model – finish): JHT-896L -WT

Description:	Euro-style track head usin
	on WAC's tracks and adap
	(Consult factory for specifi

ng one MR16 lamp. Designed for use ptable to other manufacturers' tracks.

fic brands).

Materials: Die-cast aluminum body with steel yoke, polycarbonate

transformer case, ceramic bi-pin socket for MR16 lamp, and

clear lens.

Transformer

Product Details

Integral electronic transformer for 12V MR16 lamp.

Input voltage:120VAC / 60HZ

MR16 MAX 50W lamp (Series 896); Lamping:

MR16 MAX 75W lamp (Series 896L);

(Lamps sold separately)

Socket: Ceramic Bi-pin G5.3 / G6.35 socket

Finish: Powder coat paint finish.

Available in Black (BK) and White (WT)

Standards: UL & CUL Listed

Specification Features


- Accepts different lenses and accessories.
- 360° horizontal rotation and 180° vertical aiming
- Dimmable with ELV (Electronic Low Voltage) dimmer.
- 5 year WAC Lighting product warranty.

Compatible Accessories (Sold Separately)			
Color Dichroic Lens	Clear Lens	Color Lens	
• UV Filter	Beam Softening (Frosted) Lens	Beam Spreading Lens	
Barn Doors	Framing Projector		



CATALOG NUMBER	<u>TYPE</u>
PROJECT	

Photometry

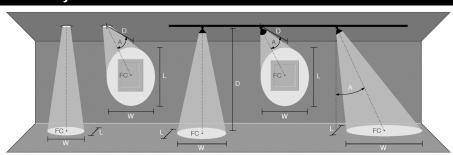

D Distance To Fixture From Wall Or Floor FC Initial Footcandle Level At Center Of Beam Beam Length (where candlepower drops to 50% of maximum)

Beam Width (where candlepower drops to 50% of maximum) L W

896 MR16 50W (40 DEG)				
0° Aiming Angle				
D(ft)	FC	L	W	
6	21	5.6	5.6	
9	9	8.5	8.5	
12	5	11.3	11.3	
15	3	14.1	14.1	
45° Aiming Angle				
D(ft)	FC	┙	W	
6	7	14.5	8.0	
9	3	21.8	12.0	
12	2	29.0	16.0	
15	1	36.3	20.0	

