
## TWIST - model: 197

## Low Voltage Quick Connect™ Luminaire

# **WAC LIGHTING**

## Responsible Lighting®

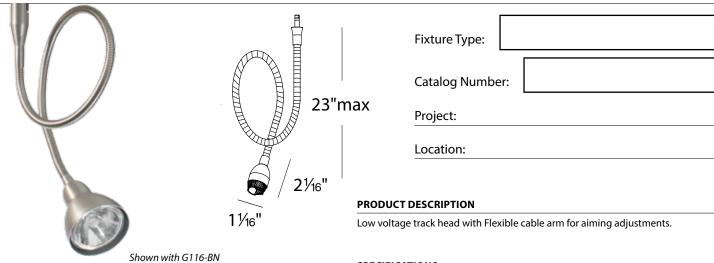

#### **FEATURES**

- Flexible cable arm provides for all vertical and horizontal aiming adjustments.
- Compatible with all Quick Connect<sup>™</sup> rail and track systems when using the proper adapter (see adapter chart on next page)
- Use on all Quick Connect™ Canopies (see canopy options on next page)
- 5 year WAC Lighting product warranty

### **SPECIFICATIONS**

**Construction:** Machined brass construction. All metal track head parts with metal spring band to retain shade. Shades are either glass or metal.

Finish: Available in electroplated Brushed Nickel (BN).


**Lamping:** Accepts 12V LED MR16, Halogen MR16 lamps up to 50W max (order lamp separately).

**Dimming:** Dim to 10% depending on system power supply. Use ELV (electronic low voltage) dimmer with electronic transformer. Use magnetlic low voltage dimmer with magnetic transformer.

Standards: UL & CUL Listed.

### **ORDER NUMBER**

Model #	Finis	sh
QF-197	BN	Brushed Nickel



Example: QF-197-BN

#### **GLASS AND SHIELD OPTIONS (ORDER SEPARATELY)**

G111			G112		G113		<b>G114</b> co	ased glass	5		<b>G115</b> n	nesh	<b>G116</b> so	olid
2¼"W × 13	4″H		2½"W×	1¾"H	3%"W×	1%"H	25/8"W×	2½"H			2¼"W×	1¾"H	2¼"W×	1¾"H
				A										
AM	BL	WT	AM	WT	AM	WT	AM	BL	RD	WT	BN	DB	BN	DB

AM Amber
BL Blue
BN Brushed Nickel
DB Dark Bronze
RD Red
WT White

**BN** Brushed Nickel

**DB** Dark Bronze

### **LED MR16 (ORDER SEPARATELY)**

Model	Finis	h	Power	CCT	Volt	Lumens	Average Life	CRI	Beam	Photometry
MR16LED-BAB	BK WT	Black White	8W	3000K	12V	450	25,000 Hours	85	35°	

Example: MR16LED-BAB-WT

See Next Pages for Canopy & Adapter Options

### WAC Lighting www.waclighting.com Phone (800) 526.2588 • Fax (800) 526.2585

**Headquarters/Eastern Distribution Center**44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050

### **Western Distribution Center** 1750 Archibald Avenue • Ontario, CA 91760 Phone (800) 526.2588 • Fax (800) 526.2585

**EXTENSIONS (ORDER SEPARATELY)** 

Q-X18 18"

**Q-X24** *24"* **Q-X36** *36"* 

Q-X48 48"

## TWIST - model: 197

# **WAC LIGHTING**

## Low Voltage Quick Connect™ Luminaire

## Responsible Lighting®

### Quick Connect<sup>™</sup> Adapters for Track and Rail systems


#### Rail System Model # Finish BN Solorail™ LM-QADP DB BN Duorail™ LM2-QADP DB DB Flexrail1™ HM-EN50 PΤ

120V Track		Model #	Finish
	L Track	EN-LQ50AR	BK BN WT
	H Track	EN-HQ50AR	BK BN DB WT
	J/J2 Track	EN-JQ50AR	BK BN WT

FINISHES						
<b>BN</b> Brushed Nickel						
<b>BK</b> Black						
<b>DB</b> Dark Bronze						
<b>PT</b> Platinum						
<b>WT</b> White						

### Monopoint Canopies (Remote Transformers Required)

- · Order remote transformer separately
- No visible hardware

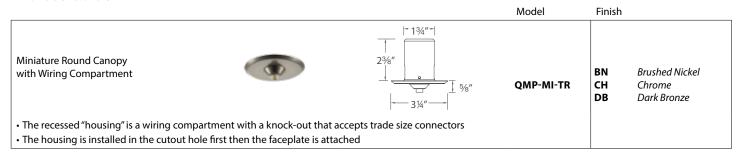

Class 2 Enclosed Electronic Transformers

	Model	input	Output	Min Load	L	VV	П	
c (UL) us	EN-1260-RB2 EN-2460-RB2 EN-24100-RB2	120V 120V 120V	12V, 60W 24V, 60W 24V, 96W	1W 1W 1W	6½"	15/8" 15/8" 15/8"	11/4"	Fits through small openings
c(U)us	EN-12120-RB2 EN-12180-RB2 EN-12300-RB2	120V 120V 120V	12V, 2 × 60W 12V, 3 × 60W 12V, 5 × 60W	1W	074	<b>3</b> %8	25/8" 25/8" 25/8"	Includes LED indicator lights and integral push in terminals

Round Canopy for Junction Box  • Mounts over a standard 4" junction box • Base plate covers junction box opening,	the canopy attaches to base plate	4½" 1 5%"	QMP-1RN-TR	BN CH DB WT	Brushed Nickel Chrome Dark Bronze White
Square Canopy For Junction Box  • Mounts over a standard 4" junction box • Base plate covers junction box opening,	the canopy attaches to base plate	$4\frac{1}{2}$ with metal nut	QMP-1SQ-TR	BN CH DB	Brushed Nickel Chrome Dark Bronze

Class 2 Non-Enclosed
<b>Electronic Transformer</b>

	Model	Input	Output	Min Load	L	W	Н	
<b>71</b> ° us	EN-1260-R2	120V 50/60Hz	12V, 60W	1W	<i>2</i> %"	1%″	1″	All Connections must be made in an enclosure for proper installations

WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

**Headquarters/Eastern Distribution Center** 44 Harbor Park Drive • Port Washington, NY 11050 Phone (516) 515.5000 • Fax (516) 515.5050 Western Distribution Center 1750 Archibald Avenue • Ontario, CA 91760 Phone (800) 526.2588 • Fax (800) 526.2585

## TWIST - model: 197

## Low Voltage Quick Connect<sup>™</sup> Luminaire

# WAC LIGHTING

Responsible Lighting®

### Monopoint Canopies (Integral Transformers)

- 1W minimum load
- 60W Integral electronic transformer
- · Smooth and continuous ELV dimming

• For use with a 4" junction box; includes optional collar for shallow junction box Model Finish ΒN **Brushed Nickel** 13/4" **Adapter Canopy** QMP-60ERN CH Chrome Dark Bronze DB 45/81 BN **Brushed Nickel** Sloped Ceiling Canopy CH Chrome QMP-S60ERN Dark Bronze DB • Swivels up to 45° in either direction and will accept all WAC Lighting Quick Connect™ pendants and fixtures

Example: QMP-60ERN-BN

### Mirror Glass Multipoint Canopies (Integral Transformers)

- 1W minimum load
- 60W Integral electronic transformer for each drop

• Smooth and continuous ELV dimming Model Finish 181/8" 12-Point Mirrored Canopy Round OMP-G12RN 20% 15" 6-Point Mirrored Canopy Round QMP-G6RN 21/4" 3-Point Mirrored Canopy Round QMP-G3RN MR Mirror 11341 41/5" 13/4 1-Point Mirrored Canopy Round QMP-G1RN 21/4" ▝ 6" 23¾" 3-Point Mirrored Canopy Rectangular OMP-G3RE 11¾"

Example: QMP-G6RN-MR