


CATALOG NUMBER	TYPE
PROJECT	

12V MAGNETIC TRANSFORMER **MODEL SRT-1000M-12V**

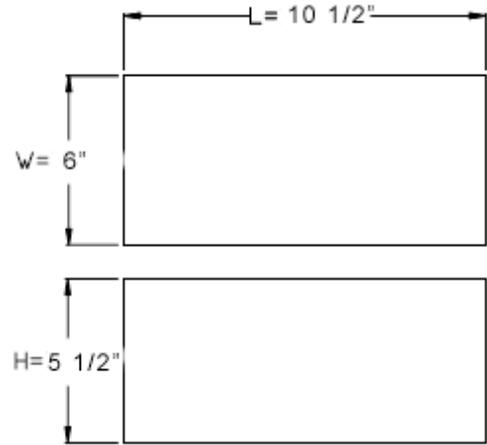

Ordering Matrix		
Model	Finish	Accessories
[]	[]	
SRT-1000M-12V	BK	<i>See table below</i>

Ordering Example (model-finish) : SRT-1000M-12V

Product Details	
Description:	Short Circuit Protection. Thermal Protection. Boost Top Option 250 watt for per circuit . Suitable for damp locations
Catalog Number:	1000M = 1000 watt ; M = Magnetic 12V = 12 Volt
Input:	120V (60Hz)
Output:	12V
Max Load:	1000W (4 x 250W circuit)
Max Input Amp:	8.3A (@ 120V)
Transformer Frequency:	60 Hz
Dimming:	Dimmable with magnetic dimmers. Dimmers should always be installed on the primary side of the transformer.
Listing:	U.L. listed, File Number E223916.

Specification Features
<ul style="list-style-type: none"> • Wiring: Knock out holes on both sides, for convenient wiring. Input lead wire length is 6". Output screw terminals for tight wire connections. • Dimming: Use magnetic low volt dimmers. Dimmers are installed on primary wiring side. • Protection: Automatic resetting thermal protector on the primary side. Magnetic transformers feature "push to reset" circuit breaker. • 5 year WAC Lighting product warranty.