
# **Model: 816**

## 120V Track MR16 Luminaire

# WAC LIGHTING

# Responsible Lighting®

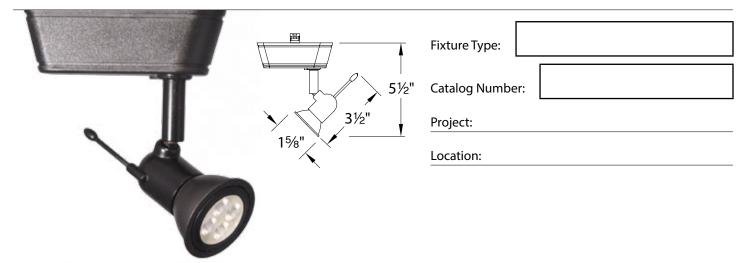

#### PRODUCT DESCRIPTION

Low Voltage luminaire with die-cast aluminum construction and aiming wand for precise aiming.

#### **FEATURES**

#### · Available with LED lamp option

- · Easily re-lamped from the front without the use of tools
- · Use aiming wand for easy adjustment
- · 350° horizontal rotation and 90° vertical tilt
- Dimmable
- 5 year WAC Lighting product warranty

#### **SPECIFICATIONS**

**Construction:** Die-cast aluminum track head with polycarbonate transformer case and track adapter. Bi-pin ceramic socket for MR16 lamp.

**Finish:** Powder coated Black (BK), White (WT), and Electroplated Brushed Nickel (BN).

**Transformer:** LED Version - 1W minimum load. Halogen Version - 20W minimum load (1W minimum load available. Consult factory for more details).


Lamp: 816 model uses 12V MR16, 50W max lamp (not included). 816L model uses 12V MR16, 75W max (not included). 816LED model uses a 12V, 8W MR16 LED lamp (included). 450 lumens, 3000K CCT, 25,000 hour rated life, CRI: 85.

**Dimming:** With electronic low voltage (ELV) dimmer, LED lamp dims to 10%; Halogen lamp dims to 1%.

Standards: UL & CUL Listed.

## ORDER NUMBER

System		Model #	Power	Lamp	Finish	
		816LED 816	8W 50W	LED Halogen	BK BN	Black Brushed Nickel
JHT	J/J2 Track	816L	75W	Halogen	WT	White



Example: LHT-816LED-BK

## **FINISHES**

(







#### ACCESSORIES

ACCESSORIES								
		AMB	Amber	UV Filter	LENS-16-UVF			
		BLU	Blue	Frosted Lens	LENS-16-FR			
Color Lens	LENS-16-	GRN	Green	Spread Lens	LENS-16-SPR			
		RED	Red	Beam Elongating Lens	LENS-16-BEL			
		YEL	Yellow	Honeycomb Louver	LENS-16-HCL			

**WAC Lighting** 

www.waclighting.com Phone (800) 526.2588 • Fax (800) 526.2585 **Headquarters/Eastern Distribution Center**44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050

**Western Distribution Center** 1750 Archibald Avenue • Ontario, CA 91760 Phone (800) 526.2588 • Fax (800) 526.2585