


# SOLORAIL™ - model: LM-EN12-150M

## Surface Mount Transformers

# WAC LIGHTING

Responsible Lighting®

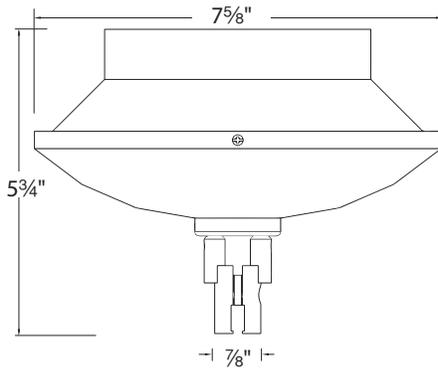

Fixture Type:

Catalog Number:

Project: \_\_\_\_\_

Location: \_\_\_\_\_

### PRODUCT DESCRIPTION

Surface mount magnetic low voltage transformer for the WAC Solorail™ system. The canopy style enclosure includes the transformer and the track power feed adapter. The standoff height can be increased by the use of two LM-R extension rods.

### FEATURES

- 7<sup>5</sup>/<sub>8</sub>" Canopy
- Use with 5<sup>3</sup>/<sub>4</sub>"(LM-X5) standoff
- Voltage Drop at Run length 40'
- Dims with magnetic low voltage dimmers.
- Output circuit breaker located on the upper lip of the canopy enclosure is a magnetic push to reset type.
- Contains integral de-buzzing coil.
- The surface mount canopy transformer is an ideal choice when the installation is on an existing ceiling.
- 5 year WAC Lighting product warranty

### SPECIFICATIONS

**Power:** Input - 120V (50/60Hz), Output - 12V  
150W maximum load.

**Mounting:** Installs to a standard junction box. Total weight = 6.4 lbs. The standard LM-EN12-150M configuration matches the height of the 5<sup>3</sup>/<sub>4</sub>" standoffs.

**Finishes:** Available in Dark Bronze (DB) and Brushed Nickel (BN).

**Standards:** UL & CUL listed

### ORDER NUMBER

Model	Power	Finish
LM-EN12-150M	150W	BN <i>Brushed Nickel</i>
		DB <i>Dark Bronze</i>

### EXTENSION RODS

Model	Length	Finish
LM-R	12 12"	BN <i>Brushed Nickel</i> DB <i>Dark Bronze</i>
	24 24"	
	36 36"	
	48 48"	

**LM-EN12-150M** -

Example: LM-EN12-150M-BN

WAC Lighting  
www.waclighting.com  
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive • Port Washington, NY 11050  
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center  
1750 Archibald Avenue • Ontario, CA 91760  
Phone (800) 526.2588 • Fax (800) 526.2585