
HR-2LED-R14D

2" Tesla™ Remodel Housing Non-IC

WAC LIGHTING

Responsible Lighting®

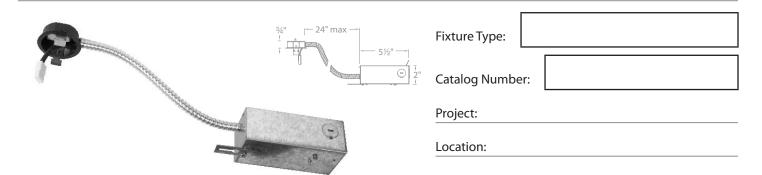

PRODUCT DESCRIPTION

Non-IC, remodel housing. For use with HR-2LED Tesla 2" series trims.

FEATURES

- Provided with push-in wire connector for easy installation
- 5 year WAC Lighting product warranty

ORDER NUMBER

HR-2LED-R14D

Remodel
Non-IC

SPECIFICATIONS

Construction: Housing and junction box are 20 gauge steel

J-Box: Three knockouts for ease of installation. Rated for branch wiring.

Driver: Electronic driver, 120 - 277VAC input, 14.5W output.

Power factor >0.9 Dimming with thermal protection.

Mounting: Accommodates surface thickness ½"-¾"

3%" cutout hole.

Dimming: 0-10V Dimming: 100%-10%

ELV Dimming: 100%-15% (120V only)

Standards: Non-IC - insulation must be kept at least 3" away from the housing

ETL & cETL Listed.

COMPATIBLE TRIMS See trim spec sheets for complete order number and specifications.

Tesla Pro 2"

HR2LD-ET109P Series Round, High Brightness Wet Location Listed Energy Star®	HR2LEDT209P Series Round, Shower Light Wet Location Listed Energy Star®
HR2LEDT109P Series Round, Open Reflector Energy Star®	HR2LEDT709P Series Square, Open Reflector Energy Star®
HR2LEDT309P Series Round, 0°- 30° Adjustable Energy Star®	HR2LEDT509P Series Square, 0°- 30° Adjustable Energy Star®

Tesla 2"

HR-2LD-ET109 Series Round, High Brightness Wet Location Listed Energy Star®	HR-2LED-T209 Series Round, Shower Light Wet Location Listed
HR-2LED-T109 Series Round, Open Reflector	HR-2LED-T709 Series Square, Open Reflector
HR-2LED-T309 Series Round, 0°-30° Adjustable	HR-2LED-T509 Series Square, 0°- 30° Adjustable

waclighting.com Phone (800) 526.2588 Fax (800) 526.2585 Headquarters/Eastern Distribution Center 44 Harbor Park Drive Port Washington, NY 11050 **Central Distribution Center** 1600 Distribution Ct Lithia Springs, GA 30122 Western Distribution Center 1750 Archibald Avenue Ontario, CA 91760